



ALCYONE
The sonic
event!




Cabasse

ALCYONE

Miniature Spheres only

4 inches in diameter,

the new Alcyone satellites feature all the acoustical qualities of any Cabasse system: efficiency, power handling, transparency and stability of the sound stage.

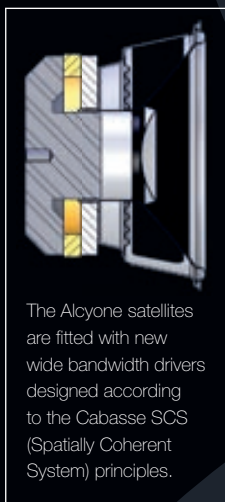


The Alcyone satellites are fitted with new wide bandwidth drivers designed according to the Cabasse SCS (Spatially Coherent System) principles.



The Alcyone satellite has a new wide bandwidth high-efficiency driver for acoustic linearity, high output, and full spatial coherency, just like the rest of the Cabasse spherical line.

This driver has been designed in the Cabasse Acoustic Center in France especially for the small spherical Alcyone enclosure.



*Alcyone is also a star,
more precisely a group
of stars made of a main
one surrounded by tiny
satellites. It shines like
no other, with 1400 times
the power of the Sun.
When astronomy meets
sound Alcyone arises.*

Integration, orientation, satisfaction

Alcyone satellites either can be placed on a shelf, mounted on the wall, or affixed atop the optional stands. The stand hides the speaker wire which is threaded through one of the stand's rod supports. The magnetic base can be used for shelf or wall mounting so the speaker can be easily oriented in any direction for ultimate flexibility in placement.

The Alcyone 5.1 system consists of one Santorin 17 subwoofer (7» woofer and 100 W amplifier), 5 satellites ready for bookshelf or on-wall use, and a complete set of interconnect cables.

Simple to install,
easy to enjoy.



Cabasse

ALCYONE

T E C H N I C A L F E A T U R E S



speaker



**speaker
on optional stand**



**Santorin 17
subwoofer**

Application	bookshelf / on wall / stand	stand	subwoofer
Drivers	wide band 8MTR5 cellulose pulp	wide band 8MTR5 cellulose pulp	woofer 17S20 - 17 cm / 6.7 in cellulose pulp
Cross-over point	-	-	adjustable 20 - 300 Hz
Phase	-	-	adjustable 0° - 180°
Frequency response	250 - 18 000 Hz	250 - 18 000 Hz	39 - 300 Hz
Sensitivity 1 W / 1 m	91 dB	91 dB	active
Nominal impedance	8 ohms	8 ohms	active
Minimum impedance	4 ohms	4 ohms	active
Power handling	50 W	50 W	100 W
Peak power	350 W	350 W	300 W
Magnetic shielding	yes	yes	no
Dimensions (h x w x d)	Ø 99 mm / 3 7/8"	105 x 16 x 16 cm 41 1/3" x 6 1/3" x 6 1/3"	30 x 30 x 30 cm 11 13/16" x 11 13/16" x 11 13/16"
Weight	0.7 kg / 1.5 lb	3,5 kg / 8 lb	10 kg / 22 lb
Finish	black / white	stand: black	black / white

Because of technical improvements already under way in our constant search for optimum quality, Cabasse reserves the right to modify all the models presented in specification sheets, advertising materials and manuals without prior notice.

Cabasse

Cabasse SA - 210, rue René Descartes - BP 10 - F-29280 Plouzané - France
Tel + 33 (0)2 98 05 88 88 - Fax + 33 (0)2 98 05 88 99
www.cabasse.com - info@cabasse.com