



**PERFORMANCES  
INVERSELY PROPORTIONAL  
TO ITS SIZE.**

Inspired by the famous Baltic line and based on the same principles of SCS technology, the iO2 System satellites take advantage of all the know-how of their big sisters. Only SCS (Spatially Coherent System) technology can give such a compact system the fundamental characteristics that all our speakers share: linearity, coherence, dynamics, power handling and absolute spatial coherency.


Equipped with a 13cm Duocell membrane driver and a rigid dome tweeter with a rare earth magnet, the iO2 System is the first audio-video offer which is compact, easy to integrate and truly hi-fi. The iO2 satellite is available in several versions, all magnetically shielded. The first version features a stable stand for optimum height positioning; the second has a dual function base for positioning on furniture or on a television set or wall mounting using a unique fixing point. The iO2 satellite's 16-cm metal sphere can be adjusted in any direction on its base using a powerful system of magnets. The third version can be built in to a ceiling or wall. Very discreet, it too is easily adjustable.



**Cabasse**



Tweeter: fitted with a Kaladex 1.1' dome membrane mounted on an AIRE cushion for extended bandwidth and increased power handling - rare earth magnet.  
5' midrange-woofer: extremely light and stiff Duocell diaphragm combined with a very powerful magnet for amazing efficiency.

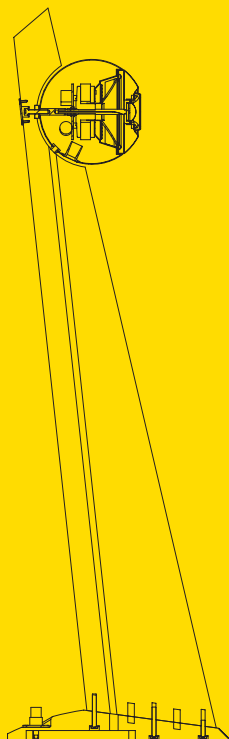

Able to deliver in stereo musical peaks over 122 dB SPL, iO2 can reproduce any type of music and sound at realistic levels with a fidelity in timbres and soundstage which has convinced numbers of audio & video professionals for stereo of multi-channel monitoring.



on stand      on wall or on base      in Ceiling      SANTORIN 25 subwoofer

|                      |                                       |   |                              |  |
|----------------------|---------------------------------------|---|------------------------------|--|
| Utilisation          | floor standing                        | bookshelf/<br>on wall                                       | in ceiling                   | floor standing                           |
| Drivers              | 1 x 1.1' tweeter<br>DOM25             | 1 x 1.1' tweeter<br>DOM25                                   | 1 x 1.1' tweeter<br>DOM25    | 1 x 25 cm (10")<br>25S20                 |
|                      | 1 x 13 cm coaxial<br>13F15-2          | 1 x 13 cm coaxial<br>13F15-2                                | 1 x 13 cm coaxial<br>13F15-2 |  |
| Efficiency 1 W/1 m   | 93 dB                                 | 93 dB   | 93 dB                        | active                                   |
| Filter               | 2700 Hz                               | 2700 Hz   | 2700 Hz                      | 0°-180°                                  |
| Phase                | -                                     | -   | -                            | 0°-180°                                  |
| Frequency bandwidth  | 150-22000 Hz                          | 150-22000 Hz  | 150-22000 Hz                 | 34-150 Hz                                |
| Nominal impedance    | 8 ohms                                | 8 ohms  | 8 ohms                       | active                                   |
| Minimum impedance    | 3.8 ohms                              | 3.8 ohms  | 3.8 ohms                     | active                                   |
| Power handling       | 80 W                                  | 80 W  | 80 W                         | 250 W                                    |
| Peak power handling  | 580 W                                 | 580 W   | 580 W                        | 750 W                                    |
| Magnetic shielding   | yes                                   | yes   | -                            | -  |
| Dimensions H x W x D | 112 x 33 x 33 cm<br>41.5 x 12 x 12 in | ø 16 cm<br>ø 6.5 in   | ø 26 cm<br>ø 10.2 in         | 42 x 36 x 38 cm<br>16.5 x 14.2 x 14.6 in |
| Weight               | 15 kg / 33 lb                         | 1.8 kg / 4 lb   | 1.9 kg / 4.2 lb              | 19 kg / 42 lb                            |
| Finish               | Pearl<br>Black pearl                  | Pearl<br>Black pearl<br>White<br>Matt grey<br>Matt charcoal | White                        | White<br>Shiny Black                     |



# Cabasse

Cabasse SA - 210, rue René Descartes - BP 10 - 29280 Plouzané  
Tel +33 (0)2 98 05 88 88 - Fax +33 (0)2 98 05 88 99  
www.cabasse.com - info@cabasse.com