



KARISSIMA

DRIVE UNITS

1 x TC23 3-way 8" coaxial driver:

- tweeter unit: 1" dome diaphragm 3,500 - 22,000 Hz
- midrange unit: 5" P2C ring 800 - 3,500 Hz
- low-midrange unit: 8" Duocell ring 100 - 800 Hz

1 x 30ND40 woofer: 12" honeycomb dome 35 - 100 Hz

CROSS-OVER POINTS: 100 – 800 – 3,500 Hz

FREQUENCY RESPONSE: 35 – 25,000 Hz \pm 3 dB on axis (open space conditions)

FREQUENCY RANGE: -6dB at 20 Hz and 25 kHz (open space conditions)

DISPERSION: within 2 dB of reference response: over 60° arc for any plan, forming a perfect 60° cone

SENSITIVITY: 91 dB (2.8 V/1m)

NOMINAL IMPEDANCE: 8 Ω

MINIMUM IMPEDANCE: 3.2 Ω


POWER HANDLING: 180 W

PEAK POWER: 1260 W

STANDARD FINISH: Wenge – Wild Cherry - Santos

SPEAKER DIMENSIONS (H x W x D): 1450 x 380 x 540 mm
55.1 x 27.6 x 27.6 in

WEIGHT: 70 kg / 154 lb

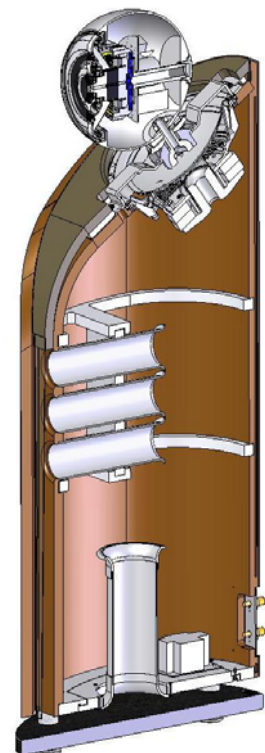

www.cabasse.com

Cabasse